




**Jantar**

Entry control for home and office



## Power supply with communication converter Spider W5-B

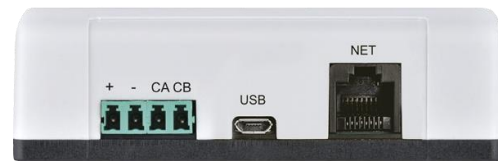

- 15 W power supply with built-in communication converter for standalone access controllers Rex or time & attendance controllers Regis
- Communication converter for multiple access controllers Populus in a single RS-485 communication line
- RS485-TCP/IP or RS485-USB communication converter
- Powerful enough to power one standalone controller and one DC door strike or electromagnetic lock
- Pluggable connectors (RS-485 communication line and power output)
- RJ-45 and USB micro sockets

### TECHNICAL DATA

- **Dimensions: 120x80x33 mm**
- **Operating voltage: 230 V AC**
- **Output: 12 V DC, 0.8 A**
- **Primary fuse: F100, 250 V 0.25 A**
- **Secondary fuse: F101, 16 V 1.1 A, resetable**
- **Pluggable connectors**
- **RJ-45 connector**
- **USB micro connector**
- **Power consumption: less than 1W + load**
- **Operating temperature: +5 to +40°C**
- **LED status notification**

### ORDERING CODE

Code	Specification
<b>SPIDER W5-B</b>	Power supply with communication converter (15W)